

Review Article

The Numerical Simulation of Force with Parameters in Three & Five Freedoms of Robotic Arm I

Run Xu^{1*}¹Gyeongsang National University, Metallurgical Engineering Dept., Chinju 52828, Korea**Article History**

Received: 22.06.2021

Accepted: 26.07.2021

Published: 28.07.2021

Journal homepage:<https://www.easpublisher.com>**Quick Response Code**

Abstract: In robot design and application the force and angle with angular speed is important so this study will model numerical simulation and discuss detail data to investigate their property. The force may increase as arm 1 angle increases whilst it may increase if angular speed increases in three freedoms. Meantime it will decrease if angular acceleration increases. It is found that with the angular speed increasing all three force may increase whilst the angular acceleration will cause its increase too in five freedoms. From these value it is observed that F_1 is prior one to ensure the strength and fatigue life to estimate its strength then F_2 is second one whilst F_2 and F_3 may be neglected in three freedoms. The force may increase as arm 1 angle increases whilst it may increase if angular speed increases in three freedoms. Meantime it will decrease if angular acceleration increases. The force size is $F_2 > F_1 > F_3$ in five freedoms whilst the turn is $\omega > \dot{\omega}$ here ω is angular speed and $\dot{\omega}$ is angular acceleration.

Keywords: Numerical simulation; force and angle; angular speed & acceleration; robotic arm; angular Acceleration; three & five freedoms.

Copyright © 2021 The Author(s): This is an open-access article distributed under the terms of the Creative Commons Attribution **4.0 International License (CC BY-NC 4.0)** which permits unrestricted use, distribution, and reproduction in any medium for non-commercial use provided the original author and source are credited.

1 INTRODUCTION

In recent the robotic arm has been applied to many occasion in factory which can help people to work in difficult, dirty and dangerous place so its application will be more prevailed in future which is estimated in this study. China has been the largest country which can own the largest domestic market in the world, but it has the third market occupant since it has been not owning the enough advanced condition [1-6]. So that we must positively construct the clean and criteria house to meet the demand for robotic arm to ensure precise work.

In robotic design the force is an important factor to consider since the strength must meet demand no matter what it may work in factory. [5~6] So that according to the function it may be designed to satisfy the no fracture and longer fatigue life for its long life and high load to work in automatic flow line to be substituted to human worker. The biggest one will destination in this paper and how to save manufacture cost is the second one. So it is needed that the mass and load may become first thing to prepare; secondly for the cost decrease the redundant load shall be prohibited.

In this paper the condition is changed like angular speed and acceleration to observe the three

forces status to ensure security of strength and save cost status. The three freedoms and five ones are investigated in this paper detail with parameters like force and angle with angular speed and acceleration. We try to find the various condition of effective factor in order to search intrinsic properties relationship which is the destination in this paper.

In general the properties are searched through parameters in detail. We look forward to finding new change with force and speed & acceleration for further research. For the sake of observing them difference it is used to three freedoms ad five freedoms mechanism in robot arms. We try to find the intrinsic relationship between them in this paper whilst we establish the dynamic equation model to draw the curves to investigate the whole angle of robot arms to change further and to continue last paper [7].

2 Numerical Simulation

In Figure 1 there are three freedoms in mechanical arm that name as 1~3. Meantime there are two other ones call 4&5 which is included in five freedoms as a rotational and crawling function. In Figure 1 the schematic shows the simplified principle of robot. The coordinate XAY is three freedoms and

X'AY it five freedoms. In this study the five freedoms not three one is deduced since it is complicated.

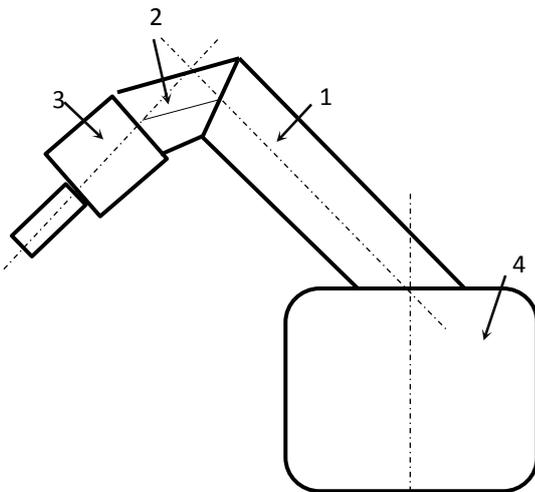


Figure 1: Construction schematic of mechanical arm in series in robot 3-hand part; 2-wrist part; 1-arm part; 4-waist part

In Figure 1 there are three freedoms in mechanical arm that name as 1~3. Meantime there are two other ones call 4&5.

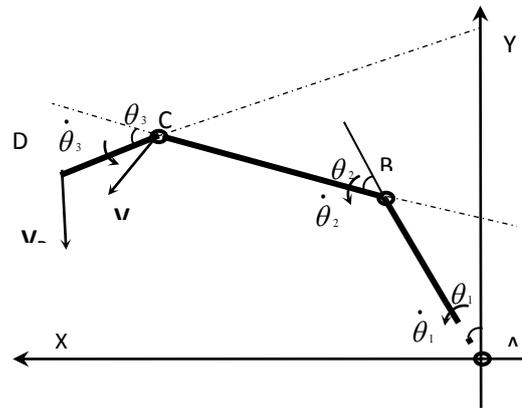


Figure 2: Principle schematic of mechanical arm in series in robot

Here $\theta_{21} = 360^\circ - (\theta_1 + \theta_2)$.

System kinetic energy is

$$E_k = \frac{1}{2} \sum_i^n (m_i v_i^2 + m_i v_{ci}^2 + J_i \omega_i^2) \dots \dots \dots (1)$$

Here m_i : mass of i component; J_i : rotary inertia of i component relative to center of mass; v_i : center of mass in i component; ω_i : angular velocity in i component; v_1, v_2 and v_3 is 1, 2 and 3 velocities respectively.

$$v_D = \sqrt{\dot{X}_D^2 + \dot{Y}_D^2} \dots \dots \dots (2)$$

From Figure 2 it is known that position coordinate below

$$\begin{cases} X_D = l_1 \sin \theta_1 + l_2 \sin(\theta_1 + \theta_2) + l_3 \sin(\theta_1 + \theta_2 + \theta_3) \\ Y_D = l_1 \cos \theta_1 + l_2 \cos(\theta_1 + \theta_2) + l_3 \cos(\theta_1 + \theta_2 + \theta_3) \end{cases} \dots \dots \dots (3)$$

Derivating the equations we gain the \dot{X}_c, \dot{Y}_c and \dot{X}_D velocity in hand, $\dot{\theta}_1, \dot{\theta}_2$ and $\dot{\theta}_3$ one in joints. Suppose that the acceleration is $\ddot{\theta}_1, \ddot{\theta}_2$ and $\ddot{\theta}_3$ and the angular acceleration is $\ddot{\omega}_1, \ddot{\omega}_2$ and $\ddot{\omega}_3$ in joints.

$$\begin{cases} \dot{X}_D = \dot{\theta}_1 l_1 \cos \theta_1 + (\dot{\theta}_1 + \dot{\theta}_2) l_2 \cos(\theta_1 + \theta_2) + (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) l_3 \cos(\theta_1 + \theta_2 + \theta_3) \\ \dot{Y}_D = \dot{\theta}_1 l_1 \sin \theta_1 + (\dot{\theta}_1 + \dot{\theta}_2) l_2 \sin(\theta_1 + \theta_2) + (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) l_3 \sin(\theta_1 + \theta_2 + \theta_3) \end{cases} \dots \dots \dots (4)$$

v_B, v_C and v_D is B, C and D velocities respectively. So D point velocity is

$$v_D = \sqrt{\dot{X}_D^2 + \dot{Y}_D^2} = \sqrt{l_1^2 \dot{\theta}_1^2 + l_2^2 (\dot{\theta}_1 + \dot{\theta}_2)^2 + l_3^2 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3)^2 + 2l_1 l_2 \dot{\theta}_1 (\dot{\theta}_1 + \dot{\theta}_2) \cos \theta_2 + 2l_1 l_3 \dot{\theta}_1 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \cos(\theta_1 + \theta_3) + 2l_2 l_3 (\dot{\theta}_1 + \dot{\theta}_2) (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \cos \theta_3} \dots \dots \dots (5)$$

C point velocity is

$$v_C = \sqrt{\dot{X}_C^2 + \dot{Y}_C^2} = \sqrt{l_1^2 \dot{\theta}_1^2 + l_2^2 (\dot{\theta}_1 + \dot{\theta}_2)^2 - 2l_1 l_2 \dot{\theta}_1 (\dot{\theta}_1 + \dot{\theta}_2) \cos \theta_2} \dots \dots \dots (6)$$

$$v_B = \vec{l}_1 \dot{\theta}_1 \dots\dots\dots (7)$$

Substituting two equations above to equation below

$$E_K = \frac{1}{2} \vec{l}_1 (\vec{l}_1 + \vec{l}_4 + \vec{l}_5) (m_1 + m_2 + m_3) \theta_1^2 + \frac{1}{2} \vec{l}_2 (\vec{l}_2 + \vec{l}_4 + \vec{l}_5) m_2 (\theta_1 + \theta_2)^2 + \frac{1}{2} \vec{l}_2 (\vec{l}_2 + \vec{l}_4 + \vec{l}_5) m_2 (\dot{\theta}_1 + \dot{\theta}_2)^2 + \frac{1}{2} \vec{l}_3 (\vec{l}_3 + \vec{l}_4 + \vec{l}_5) m_3 (\theta_1 + \theta_2 + \theta_3)^2 + 2 \vec{l}_1 \vec{l}_2 m_2 \dot{\theta}_1 (\dot{\theta}_1 + \dot{\theta}_2) \cos \theta_2 + \vec{l}_1 \vec{l}_2 m_3 \dot{\theta}_1 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \cos(\theta_1 + \theta_2) + \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_2) (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \cos \theta_3 + \frac{1}{2} (\vec{l}_4 + \vec{l}_5) (m_1 + m_2 + m_3) \theta_1^2 + \frac{1}{2} (\vec{l}_4 + \vec{l}_5) m_2 (\theta_1 + \theta_2)^2 + \frac{1}{2} (\vec{l}_4 + \vec{l}_5) m_2 (\dot{\theta}_1 + \dot{\theta}_2)^2 \dots\dots\dots (8)$$

Here

$$\frac{\partial E_K}{\partial \dot{\theta}_1} = (\dot{\theta}_1 + \dot{\theta}_2) \vec{l}_2 m_2 + 2(\dot{\theta}_1 + \dot{\theta}_2) \vec{l}_1 \vec{l}_2 m_2 \cos \theta_2 + 2 \dot{\theta}_1 \vec{l}_1 \vec{l}_2 m_2 \cos \theta_2 + \dot{\theta}_1 \vec{l}_1 \vec{l}_2 m_3 \cos(\theta_1 + \theta_2) + \vec{l}_1 \vec{l}_2 m_3 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \cos(\theta_1 + \theta_2) + \vec{l}_2 m_3 (\dot{\theta}_1 + \dot{\theta}_2) \cos \theta_3 + \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \cos \theta_3 \dots\dots\dots (9)$$

$$\frac{\partial E_K}{\partial \dot{\theta}_2} = \vec{l}_2 m_2 (\dot{\theta}_1 + \dot{\theta}_2) + 2 \vec{l}_1 \vec{l}_2 m_2 \dot{\theta}_1 \cos \theta_2 + \vec{l}_1 \vec{l}_2 m_2 (\dot{\theta}_1 + \dot{\theta}_2) \cos \theta_2 + \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \cos(\theta_1 + \theta_2) + \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_2) \cos \theta_3 \dots\dots\dots (10)$$

$$\frac{\partial E_K}{\partial \dot{\theta}_3} = \vec{l}_1 \vec{l}_2 m_3 \dot{\theta}_1 \cos(\theta_1 + \theta_2 + \theta_3) + \vec{l}_1 \vec{l}_2 m_3 \dot{\theta}_1 \cos(\theta_1 + \theta_2) + \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_3) \cos \theta_3 + 2J\omega\dot{\omega} \dots\dots\dots (11)$$

And it has

$$\frac{d}{dt} \left(\frac{\partial E_K}{\partial \dot{\theta}_1} \right) = \vec{l}_2 m_2 (\ddot{\theta}_1 + \ddot{\theta}_2) + 2(\ddot{\theta}_1 + \ddot{\theta}_2) \vec{l}_1 \vec{l}_2 m_2 \cos \theta_1 - 2(\dot{\theta}_1 + \dot{\theta}_2) \dot{\theta}_2 \vec{l}_1 \vec{l}_2 m_2 \sin \theta_1 + 2 \ddot{\theta}_1 \vec{l}_1 \vec{l}_2 m_2 \cos \theta_2 - 2 \dot{\theta}_2^2 \vec{l}_1 \vec{l}_2 m_2 \sin \theta_2 + \ddot{\theta}_1 \vec{l}_1 \vec{l}_2 m_3 \cos(\theta_1 + \theta_2) - \dot{\theta}_1 \vec{l}_1 \vec{l}_2 m_3 (\dot{\theta}_1 + \dot{\theta}_2) \sin(\theta_1 + \theta_2) + \vec{l}_2 m_3 (\ddot{\theta}_1 + \ddot{\theta}_2 + \ddot{\theta}_3) \cos(\theta_1 + \theta_2) + \vec{l}_2 m_3 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) (\dot{\theta}_1 + \dot{\theta}_2) \cos(\theta_1 + \theta_2) + \vec{l}_2 m_3 (\ddot{\theta}_1 + \ddot{\theta}_2) \cos \theta_3 + \vec{l}_2 m_3 (\dot{\theta}_1 + \dot{\theta}_2) \dot{\theta}_3 \cos \theta_3 + \vec{l}_1 \vec{l}_2 m_3 (\ddot{\theta}_1 + \ddot{\theta}_2 + \ddot{\theta}_3) \cos \theta_3 + \vec{l}_2 \vec{l}_3 m_3 (\ddot{\theta}_1 + \ddot{\theta}_2 + \ddot{\theta}_3) \cos \theta_3 + \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \dot{\theta}_3 \dots\dots\dots (12)$$

$$\frac{d}{dt} \left(\frac{\partial E_k}{\partial \dot{\theta}_2} \right) = \vec{l}_2 m_2 (\ddot{\theta}_2 + \ddot{\theta}_1) + 2\vec{l}_1 \vec{l}_2 m_2 \ddot{\theta}_1 \cos \theta_2 + 2\vec{l}_1 \vec{l}_2 m_2 \dot{\theta}_1 \dot{\theta}_2 \cos \theta_2 + \vec{l}_1 \vec{l}_2 m_3 (\ddot{\theta}_1 + \ddot{\theta}_2) \cos(\theta_1 + \theta_2) - \vec{l}_1 \vec{l}_2 m_3 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3)(\dot{\theta}_1 + \dot{\theta}_2) \sin(\theta_1 + \theta_2) + \vec{l}_1 \vec{l}_2 m_3 (\ddot{\theta}_1 + \ddot{\theta}_2 + \ddot{\theta}_3) \cos \theta_1 - \vec{l}_1 \vec{l}_2 m_3 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \dot{\theta}_1 \sin \theta_1 + \vec{l}_2 \vec{l}_3 m_3 (\ddot{\theta}_1 + \ddot{\theta}_2 + \ddot{\theta}_3) \cos \theta_3 - \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \dot{\theta}_3 \sin \theta_3 \tag{13}$$

$$\frac{d}{dt} \left(\frac{\partial E_k}{\partial \dot{\theta}_3} \right) = \vec{l}_1 \vec{l}_2 m_3 \ddot{\theta}_1 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) + \vec{l}_1 \vec{l}_2 m_3 \ddot{\theta}_1 \cos(\theta_1 + \theta_2) + \vec{l}_1 \vec{l}_2 m_3 \ddot{\theta}_1 \cos(\theta_1 + \theta_2) + \vec{l}_3 \vec{l}_2 m_3 (\ddot{\theta}_1 + \ddot{\theta}_3) \cos \theta_3 - \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_3) \dot{\theta}_3 \sin \theta_3 + 2J \dot{\omega} + 2J \omega \ddot{\omega} \tag{14}$$

$$\frac{\partial E_k}{\partial \theta_1} = \vec{l}_1^2 (m_1 + m_2 + m_3) \theta_1 + \vec{l}_2 \vec{l}_3 m_2 (\theta_1 + \theta_2) + \vec{l}_3^2 m_3 (\theta_1 + \theta_2 + \theta_3) - \vec{l}_1 \vec{l}_2 m_2 \dot{\theta}_1 (\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \sin(\theta_1 + \theta_2) \tag{15}$$

$$\frac{\partial E_k}{\partial \theta_2} = \vec{l}_2^2 m_2 (\theta_1 + \theta_2) + \vec{l}_3^2 m_3 (\theta_1 + \theta_2 + \theta_3) \tag{16}$$

$$\frac{\partial E_k}{\partial \theta_3} = \vec{l}_3^2 (\theta_1 + \theta_2 + \theta_3) - \vec{l}_2 \vec{l}_3 m_3 (\dot{\theta}_1 + \dot{\theta}_2)(\dot{\theta}_1 + \dot{\theta}_2 + \dot{\theta}_3) \sin \theta_3 \tag{17}$$

Potential energy of System

$$E_p = \vec{l}_1 m_1 g \cos \theta_1 + \vec{l}_2 m_2 g \cos(\theta_1 + \theta_2) + \vec{l}_3 m_3 g \cos(\theta_1 + \theta_2 + \theta_3) \tag{18}$$

$$\frac{\partial E_p}{\partial \theta_1} = \vec{l}_1 m_1 g \dot{\theta}_1 \sin \theta_1 \tag{19}$$

$$\frac{\partial E_p}{\partial \theta_2} = \vec{l}_2 m_2 g \dot{\theta}_2 \sin(\theta_1 + \theta_2)$$

$$\frac{\partial E_p}{\partial \theta_3} = \vec{l}_3 m_3 g \dot{\theta}_3 \sin(\theta_1 + \theta_2 + \theta_3)$$

Substituting Lagrange equation below (17) for above equations

Lagrange equation is

$$\frac{d}{dt} \left(\frac{\partial E_k}{\partial \dot{q}_i} \right) - \frac{\partial E_k}{\partial q_i} + \frac{\partial E_p}{\partial q_i} = F_i, (i=1,2,\dots,n) \tag{20}$$

Here E_k is kinetic of system;

E_p is potential energy of system;

q_i is generalized coordinate, it is a group of independent parameters that can define mechanical system movement;

F_i is generalized force, when q_i is an angular displacement it a torque, when q_i is linear displacement it a force;
 n is system generalized coordinate.
 System generalized force

Supposed that $F_k(k=1,2,\dots,m)$ and $M_j(j=1,2,\dots,n)$ is force and torque acting on system. Its power is

$$P = \sum_{k=1}^m (F_k v_k \cos \alpha_k) + \sum_{j=1}^n (\pm M_j \omega_j) \dots\dots\dots (21)$$

Here ω_j : angular velocity acting on component with M_j ;
 v_k : the velocity in force F_k point of action; (the syntropy +, reverse direction -)
 α_k : angle between F_k and v_k

When generalized coordinates is ϕ angular displacement generalized force=equivalent torque M_e .

$$\delta W_2 = \sum_{k=1}^m (F_k \delta v_k \cos \alpha_k) + \sum_{j=1}^n (\pm M_j \delta \omega_j) \dots\dots\dots (22)$$

Here α_k zero; F_k N; v_k m/s; ω_j °/s; M_j Nm. $\delta \phi_j$ is virtual angular displacement; δs_k is virtual displacement.

Supposing that

$$\delta s_k = \frac{\partial s_k}{\partial q_1} \delta q_1 + \frac{\partial s_k}{\partial q_2} \delta q_2 \dots\dots\dots (23)$$

$$\delta \phi_k = \frac{\partial \phi_j}{\partial q_1} \delta q_1 + \frac{\partial \phi_j}{\partial q_2} \delta q_2 \dots\dots\dots (24)$$

Replace equation below with above two equations

$$\begin{cases} F_1 = \sum_{k=1}^m \left[F_k \frac{\partial s_k}{\partial q_1} \cos \alpha_k \right] + \sum_{j=1}^n \left[M_j \frac{\partial \phi_j}{\partial q_1} \right] \\ F_2 = \sum_{k=1}^m \left[F_k \frac{\partial s_k}{\partial q_2} \cos \alpha_k \right] + \sum_{j=1}^n \left[M_j \frac{\partial \phi_j}{\partial q_2} \right] \dots\dots\dots (25) \end{cases}$$

This is generalized force equation.

2 DISCUSSIONS

As seen in Table 1 the parameter in robot arm is listed. Here $\theta_1, \theta_2, \theta_3$ is the arm 1, 2, 3 angle respectively. l_1, l_2, l_3 is arm length. m_1, m_2, m_3 is arm mass. Number is arm label. According to these parameters the below curves are gained as below in Figure 3& Figure 4. As seen in Figure 3(a~c) the force of arm1 will increase with the angular speed and acceleration increasing that expresses the proportional relation between them fitting to Newton theory well. That says that angular speed raises the acceleration meantime the later raise the force too. They all distributes into sinusoidal continuous wave that forms semiwave with 90°. The force may increase from 12N to 4KN and 15N with F_3, F_1 and F_2 . Among them F_3 is the least one and F_1 is the biggest one. The effect factor turn is $F_1 > F_2 > F_3$. so the F_1 is the important one the value attains 0.4Tons and F_1 is second attained 1.5Kg

while F_3 attains 1.2Kg. From these value it is observed that F_1 is prior one to ensure the strength and fatigue life then F_2 is second one to estimate its strength whilst F_3 may be neglected.


Table 1: Parameters of robot arms

items	Value	Item	Value
L_1/m	0.55	$\dot{\theta}_1/^\circ/s$	10~30
L_2/m	0.5	$\dot{\theta}_2/^\circ/s$	10~30
L_3/m	0.3	$\dot{\theta}_3/^\circ/s$	10~30
m_1/Kg	4.2	$\ddot{\theta}_1/^\circ/s^2$	10~30
m_2/Kg	4.2	$\ddot{\theta}_2/^\circ/s^2$	10~30
m_3/Kg	4.2	$\ddot{\theta}_3/^\circ/s^2$	10~30


As seen in Figure 3 the force may increase as arm 1 angle increases whilst it may increase if angular speed increases in three freedoms. Meantime it will decrease if angular acceleration increases in Figure

3(d). The maximum is 4KN in Figure 3(a) if angular speed is $30^\circ/s$ and acceleration is $30^\circ/s^2$ so this point will be checked to ensure the robotic arm strength.


There is big distance to attain 1KN between the conditions. The effective factor turn to the force is $F_1 > F_3 > F_2$ in three freedoms.

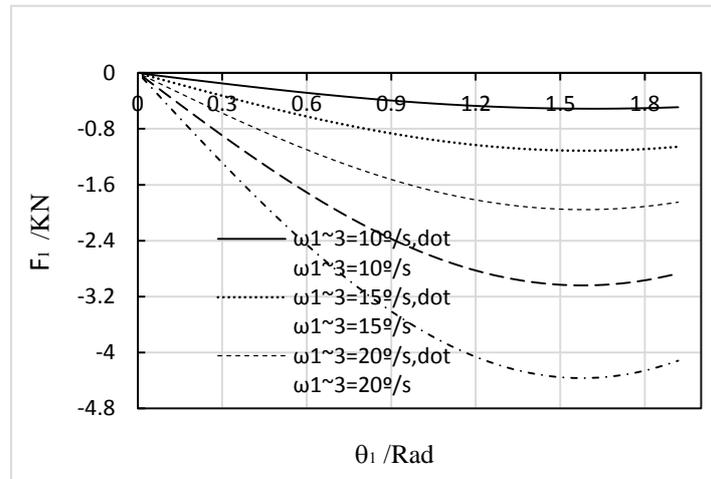

(a) F_1

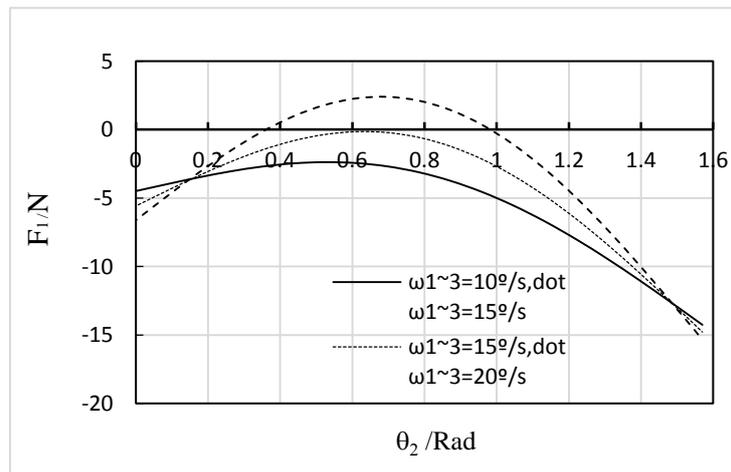


(b) F_2

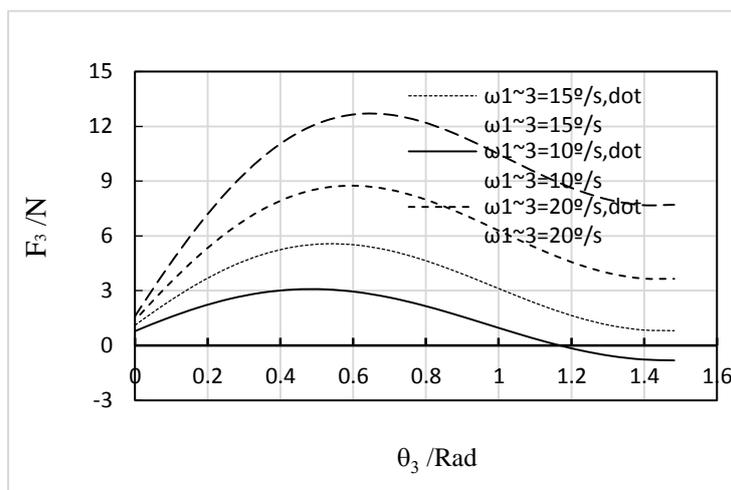

(c) F_3

(c)

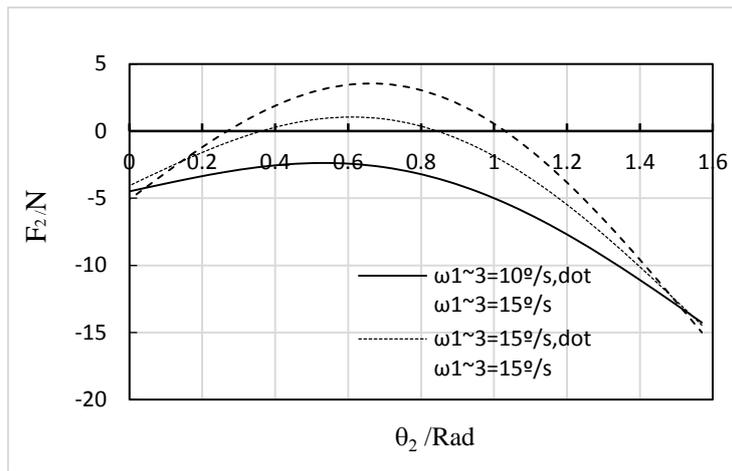


(d) F_2


Figure 3: The curve of force and angle with various angular speed and acceleration in three freedoms of robot arm

In the modeling of five freedoms in movement of robotic arm the kinetic equation is established according to Lagrange formula based on three freedoms robotic arm. It compensates the blank in four freedoms and one impulsion on robot. It is found that the first and second solution is complicated and long the whole equations is concise than the traditional equation. This is a blank in five freedoms which can shorten the whole numerical computation a lot. Referring to the important


occasion the kinetic equation will only be computed on three freedoms according to this study. As seen in Figure 4(a~c) the force value is $F_2 > F_1 > F_3$ which is the effect turn too in this five freedoms. It is different between three and five freedoms. In five freedoms the main factor is F_2 which attains 7KN as mentioned above and then the F_1 which attains 1.5KN and the least one being F_3 with 24N that may be neglected.

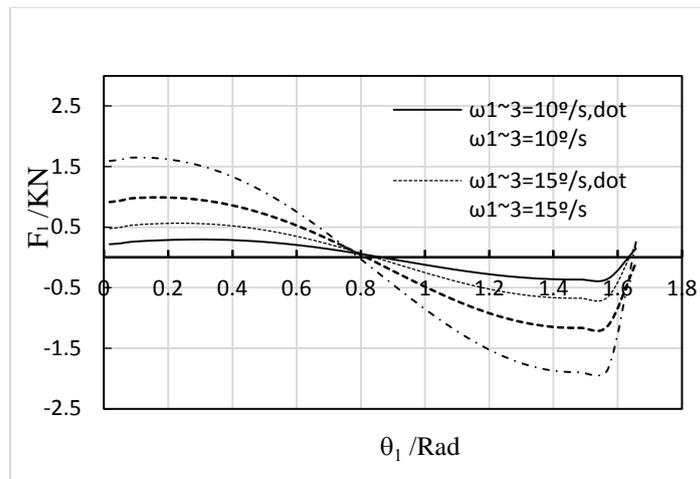

(a) F_1

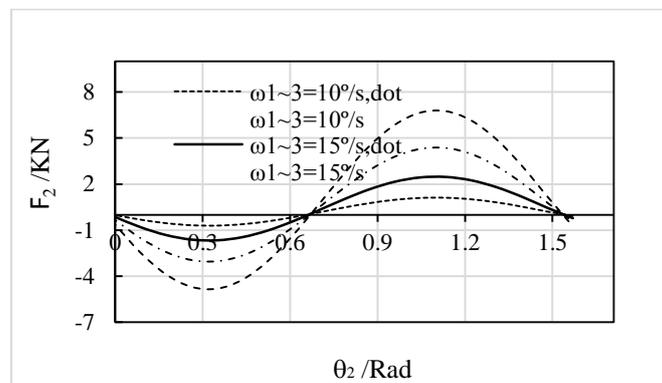

(b) F_2

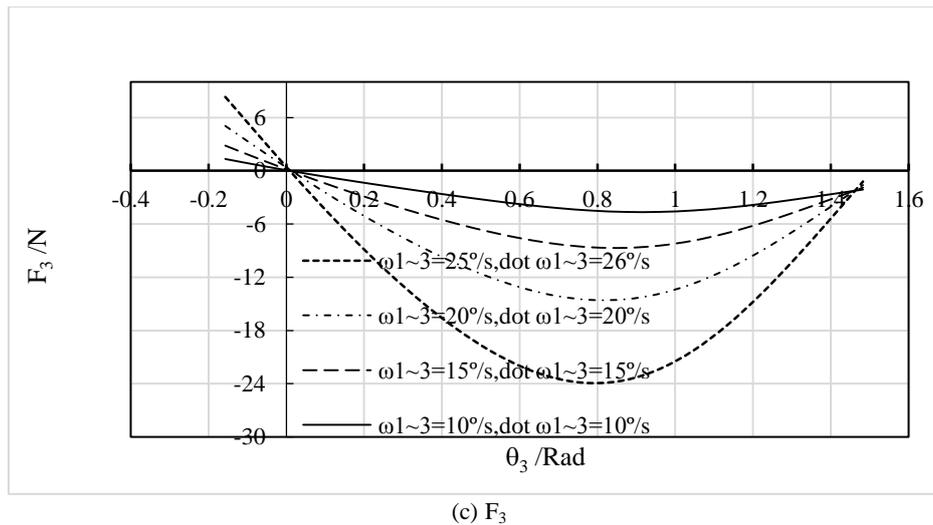

(c) F_3
Figure 4: The curve of force and angle with various angular speed and acceleration in five freedoms of robot arm

It is suggested that the big arm happens when angular speed and acceleration is big. So that the reasonable parameters are chosen to design and estimate their properties is important. Not to choose big angular speed and acceleration is key in order to increase the capability and property that may increase the whole cost as well.

Overview the computation is shorter than the five freedoms traditional one. The solution is easy to use in software like Excel and Origin. The result is satisfactory and precise to be adopted to numerical simulation so the five freedoms method based on three freedoms is feasible.

3 CONCLUSIONS

There is big distance to attain 1KN between the conditions. The effective factor turn to the force is $F_1 > F_2 > F_3$ in three freedoms whilst F_1 has 4KN force. Other two may be neglected since their small value. The force size is $F_2 > F_1 > F_3$ in five freedoms which has 7KN and 1.5KN as for first two respectively. The angular speed and angular acceleration in robot arm will incline the force whilst the turn is $\omega > \dot{\omega}$.

REFERENCES

1. Zhang, C. E. (2008). Machinery dynamics. Higher Educational Press, 96.
2. Xiong, Y., & Tang, L. (1999). The base of Robotic Technology. Huazhong University of Technology press, 89-90.
3. Run, X. (2020). The Dynamic Equation on Hammer with Lagrange in Robotic Arm, Social Science learning Education Journal, 5(8), 297-300.
4. Li, D. Y., Chen, L., Shang, X. L., Wang, Z., Wang, W., & Yang, X. (2019). Structrue design of pineapple picking manipulator [J], Agricultural Engineering, 2019, 9(2), 1-4.
5. Run, X., & Boyong, H. (2021). A Simulation between Torque and Angle with Speed on Five Freedoms of Robot Mechanical Arm in Multibody Systems, Saudi Journal of Civil Engineering, 5(5), 91-93.
6. Pengju, Y. (2012). Base on Dynamics Analysis & Precise Design with Mechanical Arm of Arthritis Rub [D], Master Degree Thesis, Jiangsu University of Technology, 3, 18.
7. Run, X. (2021). The Numerical Simulation of Properties with Parameters in Three and five Freedoms of Robotic Arm, South Asian Res J Eng Tech, 3(3), 84-85.

Cite This Article: Run Xu (2021). The Numerical Simulation of Force with Parameters in Three & Five Freedoms of Robotic Arm I. *East African Scholars J Eng Comput Sci*, 4(5), 69-76.